




# CURVA™ Micro Side Bend

## Linear Light

Side-bending, ultra-slim, and fully diffused, flexible design for millwork, trim, and small detail accents.

<https://qrco.de/bfWcL>

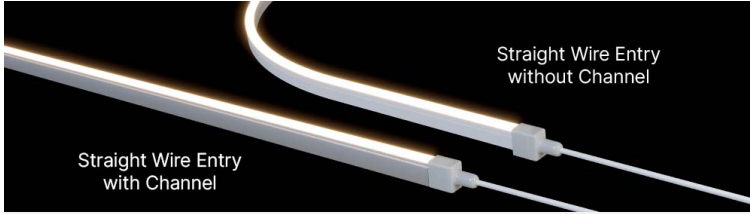

### Features

- Cuttable increments of 1 in.
- Lowest profile CURVA model
- Factory assembly (IP65), field adjustable termination (IP65)
- Maximum illumination up to 100 Lm/ft.

### General Specifications

<b>Voltage</b>	24VDC
<b>Wattage</b>	1.9 W/ft.
<b>CRI</b>	90+
<b>Environment</b>	Outdoor / Wet Location (IP65)
<b>Certification</b>	UL Listed 2108
<b>Warranty</b>	5 Year Limited
<b>Dimmable</b>	Yes
<b>Max Run (ft.)</b>	16.4 ft.
<b>TM-21 (LM-80)</b>	>50,000
<b>Ambient Temperature</b>	-4 ~ +122°F (-20 ~ +50°C)
<b>Operating Temperature</b>	-4 ~ +176°F (-20 ~ +80°C)
<b>LED Chips</b>	72/ft.

### SKU Builder

1	Brand	2	Voltage	3	Light Engine	4	Output	5	CCT	6	Length
	LCI		24		MSE-CRV		70				016
		24	(24VDC)	MSE-CRV	(CURVA Micro SIDE BEND)	70	(~70 Lm/ft.)	24	(2400K)	016	(16 Feet)
								27	(2700K)		
								30	(3000K)		
								35	(3500K)		

7 Entry A Wire Color, Length, and Connection			8 Entry B Wire Color, Length, and Connection		
Wire Color & Type	Wire Length	Wire Connection	Wire Color & Type	Wire Length	Wire Connection
WH (White CL2 - Default)	36I (36 in. - Default)	BW (Bare Wire - Default)	*blank* (No Wire - Default)	*blank* (No Wire - Default)	BW (Bare Wire - Default)
	_ in.	DC (Barrel)	WH (White CL2)	_ in.	DC (Barrel)



# CURVA™ Micro Side Bend Linear Light

Side-bending, ultra-slim, and fully diffused, flexible design for millwork, trim, and small detail accents.



<https://qrco.de/bfWcII>

## 1 LCI Brand 2 24 Voltage 3 MSE-CRV Light Engine

LCI Lucetta CI 24 (24VDC) MSE-CRV (CURVA Micro SIDE BEND)

[www.LucettaCI.com](http://www.LucettaCI.com)

## 4 70 Output 70 5 016 CCT 6 016 Length

Lumen Series	(~70 Lm/ft.)	Lumen Series	70	016	(16 Feet)
	24 (2400K)	61 Lm/ft.			
	27 (2700K)	63 Lm/ft.			
	30 (3000K)	64 Lm/ft.			
	35 (3500K)	65 Lm/ft.			

## 7 Entry A Wire Color, Length, and Connection

WH (White CL2 - Default)		36I (36 in. - Default)	__ in.	BW (Bare Wire - Default) 3.95mm (Dia.)	
				DC (Barrel) 11.43mm (Dia.)	

## 8 Entry B Wire Color, Length, and Connection

*blank* (No Wire - Default)		*blank* (No Wire - Default)	__ in.	BW (Bare Wire - Default) 3.95mm (Dia.)	
WH (White CL2)				DC (Barrel) 11.43mm (Dia.)	



# CURVA™ Micro Side Bend


## Linear Light

Side-bending, ultra-slim, and fully diffused, flexible design for millwork, trim, and small detail accents.

<https://grco.de/bfWclL>




### Dimensions

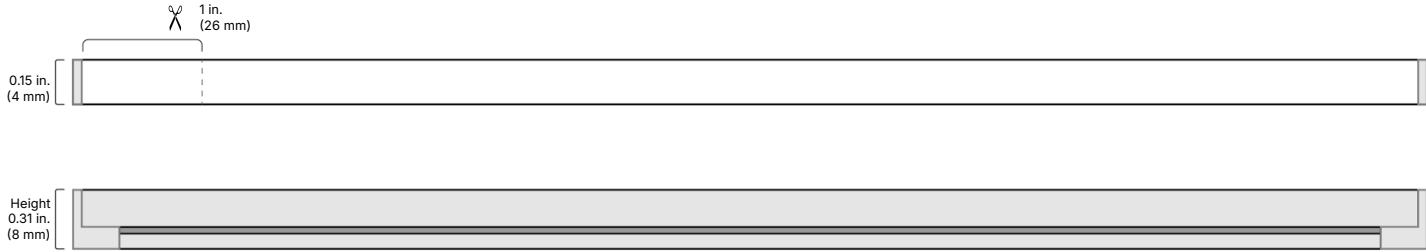

### Recommended Channels

#### CURVA Micro Side Bend Channel


LCI-CRV-MSE-MTCH-39



### Accessories


#### LCI-CRV-MSE-MTCL-2

CURVA, Micro Side Bend, Mounting Clips, 2 Pack, White



#### LCI-CRV-MSE-EC

CURVA, Micro Side Bend, End Cap Pack, 2 Open & 2 Closed





# CURVA™ Micro Side Bend

## Linear Light

Side-bending, ultra-slim, and fully diffused, flexible design for millwork, trim, and small detail accents.

<https://grco.de/bfWclL>



### Recommended Power Supplies (Sold Separately)

#### BIANCO™ U Dimmable Driver

High-performance LED driver with smooth dimming, stable output, and universal compatibility with popular controls and systems.

- Universal dimming support (ELV, Triac, and 0–10V)
- No minimum load
- 100–277VAC universal input
- 0.1% Performance dimming

For more information, visit us at:

[Hyperlink Goes Here](#)

SKU	General Specs	Input Voltage / Frequency	Output Voltage & Maximum Load	Minimum Load
LCI-BNCU-24V30W-J	Class 2, Dimmable 6.5 x 3.7 x 1.57 in.	100–277VAC, 50/60Hz	24V / 30W	None
LCI-BNCU-24V60W-J	Class 2, Dimmable 7.4 x 3.7 x 1.57 in.	100–277VAC, 50/60Hz	24V / 60W	None
LCI-BNCU-24V96W-J	Class 2, Dimmable 8.66 x 3.7 x 1.57 in.	100–277VAC, 50/60Hz	24V / 96W	None
LCI-BNCU-24V200W-J	Dimmable 10.24 x 4.13 x 1.77 in.	100–277VAC, 50/60Hz	24V / 200W	None
LCI-BNCU-24V300W-J	Dimmable 10.95 x 4.33 x 1.92 in.	100–277VAC, 50/60Hz	24V / 300W	None



# CURVA™ Micro Side Bend

## Linear Light

Side-bending, ultra-slim, and fully diffused, flexible design for millwork, trim, and small detail accents.

<https://grco.de/bfWcll>



### Safety

UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750. UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.

UL Listed Field Cuttable.

Approved for storage areas of clothes closets per NEC 410.16.A.1,3 and 410.16.C.1,3,5

### Performance

LED chip data measured in accordance to IES LM-80-08.

Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

### Safety / Warnings / Disclosures

Install in accordance with national and local electrical code regulations.

This product is intended to be installed and serviced by a qualified, licensed electrician.

Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.

Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.

Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.

Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.

Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings

Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.

Do not modify product beyond instructions or warranty will be void.

Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.

Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.

We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

### Warranty

5 Year Limited Warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at [www.diodeled.com/limited-warranty/](http://www.diodeled.com/limited-warranty/) within the Policies section. For warranty related questions please contact product support.

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.

- Lumen value measured in accordance to IES LM-79-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.