




F16 ORO COB


Factory Assembled Fixture

A 16mm fixture for diffused applications and ultra smooth performance.

<https://qrco.de/bgb24X>

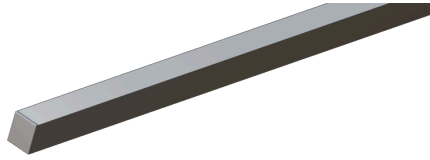

Dimensions



General Specifications

| | |
|------------------------------|---------------------------|
| Voltage | 24VDC |
| CRI | 97+ |
| Environment | Indoor / Damp Location |
| Certification | UL Listed 2108 |
| Warranty | 12 Year Limited |
| Dimmable | Yes |
| TM-21 (LM-80) | >50,000 |
| Ambient Temperature | -4 ~ +122°F (-20 ~ +50°C) |
| Operating Temperature | -4 ~ +176°F (-20 ~ +80°C) |
| LED Chips | 74/ft. |

F16 Features

<https://qrco.de/bgZE7x>

- Minimalist profile with hidden mounting
- Durable aluminum profile with a refined finish
- Wide range of lens performance

ORO™ COB Features

<https://qrco.de/bgb1TL>

- Dot-free illumination
- Smooth dimming performance housed in a discreet, small form
- Consistent, high-fidelity lighting
- Maximum illumination up to 600 Lm/ft.

SKU Builder

| 1 Brand | 2 Voltage | 3 Channel | 4 Finish | 5 Environment | 6 Light Engine | 7 Output |
|---------|------------|-----------|--------------------|--------------------------------|--------------------------------|--|
| LCI | 24 | F16 | *blank* | D | ORO-COB | |
| | 24 (24VDC) | F16 (F16) | *blank* (Aluminum) | D (Dry / Damp Location / IP20) | ORO-COB (ORO COB Light Engine) | 100 (~100 Lm/ft.) 250 (~250 Lm/ft.) 400 (~400 Lm/ft.) 600 (~600 Lm/ft.) |

| 8 CCT | 9 Lens | 10 Fixture Length | 11 Exact/Optimal | 12 Side A Wire Length | 13 Side A Wire Color & Type | 14 Side A Entry |
|--|---------------------|---|--------------------------|--------------------------------|---|-----------------------|
| | TFR | | | | | |
| 24 (2400K) 27 (2700K) 30 (3000K) 35 (3500K) | TFR (Arch. Frosted) | _I (Inches: 6-96 in.) _F (Feet: 0.5-8 ft.) | E (Exact) O (Optimal) | 36I (36 in. - Default) _in. | AW (White CL2 - Default) AB (Black CL2) AS* (Silver Plenum - *Bare Lead only) | A (End) C (Bottom) |

| 15 Side A Wire Connection | 16 Side B Wire Length | 17 Side B Wire Color & Type | 18 Side B Entry | 19 Side B Wire Connection | 20 Mounting |
|---|-------------------------------------|--|-----------------------|---|--------------------|
| | | | | | MC |
| 1 (Bare Wire - Default) 2 (Barrel - Female) 3 (Interconnect - Female) | *blank* (No Wire - Default) _in. | *blank* (No Wire - Default) BW (White CL2) BB (Black CL2) BS* (Silver Plenum - *Bare Lead only) | A (End) C (Bottom) | 1 (Bare Wire - Default) 2 (Barrel - Male) 3 (Interconnect - Male) | MC (Mounting Clip) |



F16 ORO COB

Factory Assembled Fixture

A 16mm fixture for diffused applications and ultra smooth performance.

<https://qrco.de/bgb24X>

1 Brand

LCI Lucetta CI


www.LucettaCI.com

2 Voltage

24 (24VDC)

3 Channel

F16 (F16)



4 Finish

blank (Aluminum)

5 Environment

D (Dry / Damp Location / IP20)

6 Light Engine

ORO-COB (ORO COB Light Engine)

7 Output **100** **250** **400** **600**


Wattage 1.1 W/ft. 2.7 W/ft. 4.3 W/ft. 6.6 W/ft.

Max Continuous Run (ft.) 50 ft. 35 ft. 22 ft. 14.5 ft.

8 CCT

| Lumen Series | 100 | 250 | 400 | 600 |
|--|-----------|------------|------------|------------|
| <input type="checkbox"/> 24 2400K | 97 Lm/ft. | 246 Lm/ft. | 345 Lm/ft. | 576 Lm/ft. |
| <input type="checkbox"/> 27 2700K | 99 Lm/ft. | 252 Lm/ft. | 375 Lm/ft. | 580 Lm/ft. |
| <input type="checkbox"/> 30 3000K | 86 Lm/ft. | 239 Lm/ft. | 384 Lm/ft. | 582 Lm/ft. |
| <input type="checkbox"/> 35 3500K | 95 Lm/ft. | 245 Lm/ft. | 381 Lm/ft. | 588 Lm/ft. |

9 Lens


TFR (Architectural Frosted Lens) Light Loss Dotless 

10 Fixture Length

I (Inches: 6-96 in.)

F (Feet: 0.5-8 ft.)

11 Exact/Optimal

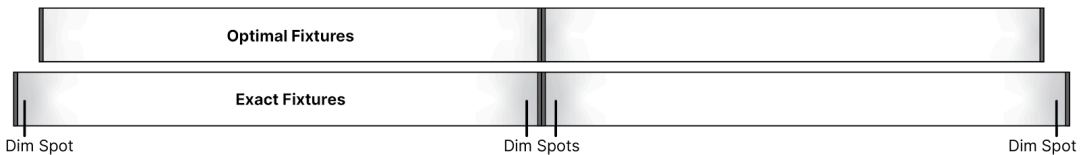



F16 ORO COB

Factory Assembled Fixture

A 16mm fixture for diffused applications and ultra smooth performance.




<https://qrco.de/bgb24X>

12 Side A Wire Length

36I (36 in. - Default)


in.

13 Side A Wire Color & Type

- AW** (White CL2 - Default) 
- AB** (Black CL2) 
- AS*** (Silver Plenum - *Bare Lead only) 




14 Side A Entry

- A** (End)
- C** (Bottom)



15 Side A Wire Connection

Default Wire Gauge: 20/2 AWG*
Contact your Lucetta CI Representative for additional wire gauge options.




- 1** (Bare Wire - Default) 3.95mm (Dia.) 
- 2** (Barrel - Female) 11.43mm (Dia.) 
- 3** (Interconnect - Female) 6.9mm x 5.6mm (W x H) 

16 Side B Wire Length

blank (No Wire - Default)


in.

17 Side B Wire Color & Type

- *blank*** (No Wire - Default)
- BW** (White CL2) 
- BB** (Black CL2) 
- BS*** (Silver Plenum - *Bare Lead only) 




18 Side B Entry

- A** (End)
- C** (Bottom)



19 Side B Wire Connection


Default Wire Gauge: 20/2 AWG*
Contact your Lucetta CI Representative for additional wire gauge options.

- 1** (Bare Wire - Default) 3.95mm (Dia.) 
- 2** (Barrel - Female) 11.43mm (Dia.) 
- 3** (Interconnect - Female) 6.9mm x 5.6mm (W x H) 

14 MC Mounting

1 2 3 4 5 6 7

MC (Mounting Clip)



Total Dimensions (Including Fixture)

Mounting Clip:
0.89 x 0.77 in. (H x W)



F16 ORO COB

Factory Assembled Fixture

A 16mm fixture for diffused applications and ultra smooth performance.

<https://qrco.de/bgb24X>

Recommended Power Supplies (Sold Separately)

BIANCO™ U Dimmable Driver

High-performance LED driver with smooth dimming, stable output, and universal compatibility with popular controls and systems.

- Universal dimming support (ELV, Triac, and 0-10V)
- No minimum load
- 100-277VAC universal input
- 0.1% Performance dimming



For more information, visit us at:


<https://qrco.de/bfWcPI>

| SKU | General Specs | Input Voltage / Frequency | Output Voltage & Maximum Load | Minimum Load |
|--------------------|--|---------------------------|-------------------------------|--------------|
| LCI-BNCU-24V30W-J | Class 2, Dimmable 6.5 x 3.7 x 1.57 in. | 100-277VAC, 50/60Hz | 24V / 30W | None |
| LCI-BNCU-24V60W-J | Class 2, Dimmable 7.4 x 3.7 x 1.57 in. | 100-277VAC, 50/60Hz | 24V / 60W | None |
| LCI-BNCU-24V96W-J | Class 2, Dimmable 8.66 x 3.7 x 1.57 in. | 100-277VAC, 50/60Hz | 24V / 96W | None |
| LCI-BNCU-24V200W-J | Dimmable 10.24 x 4.13 x 1.77 in. | 100-277VAC, 50/60Hz | 24V / 200W | None |
| LCI-BNCU-24V300W-J | Dimmable 10.95 x 4.33 x 1.92 in. | 100-277VAC, 50/60Hz | 24V / 300W | None |

VLM Series Constant Voltage Driver

Compact constant-voltage LED driver best utilized in dynamic applications.

- Compatible with PWM low voltage dimming systems
- Provides power for DMX integrated systems
- UL Listed junction box
- Small form factor

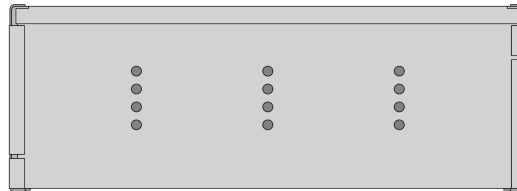

For more information, visit us at:

<https://qrco.de/bgZJJs>

| SKU | General Specs | Input Voltage / Frequency | Output Voltage & Maximum Load | Minimum Load |
|-------------------|-----------------------------------|---------------------------|-------------------------------|--------------|
| LCI-VLM-24V60W-J | Class 2 8.19 x 2.94 x 1.31 in. | 120 / 277VAC, 47 - 63Hz | 24V / 60W | None |
| LCI-VLM-24V100W-J | Class 2 8.19 x 2.94 x 1.31 in. | 120 / 277VAC, 47 - 63Hz | 24V / 96W | None |



F16 ORO COB

Factory Assembled Fixture

A 16mm fixture for diffused applications and ultra smooth performance.

<https://qrco.de/bgb24X>



Safety

UL Listed 2108 Low Voltage Luminaires. Certified for United States and Canada. File # E506975.

Approved for storage areas of clothes closets per NEC 410.16.A.3 and 410.16.C.5

Performance

Can be used to comply with TITLE 24 Part 6 High Efficacy Lighting LED requirements - JA8-2016-2022-E

LED chip data measured in accordance to IES LM-80-08.

Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

Safety / Warnings / Disclosures

Install in accordance with national and local electrical code regulations.

This product is intended to be installed and serviced by a qualified, licensed electrician.

Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.

Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.

Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.

Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.

Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings

Do not modify product beyond instructions or warranty will be void.

Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.

We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

Warranty

12 Year Limited

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.diodeled.com/limited-warranty/ within the Policies section. For warranty related questions please contact product support.

Use of an unauthorized 3rd party driver with our lighting products may void the warranty.

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.

- Lumen value measured in accordance to IES LM-79-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.